


# 4 X 3 LOCUS LIGHT WALL (NO LIGHTS)



Graphic Endcaps (Optional)

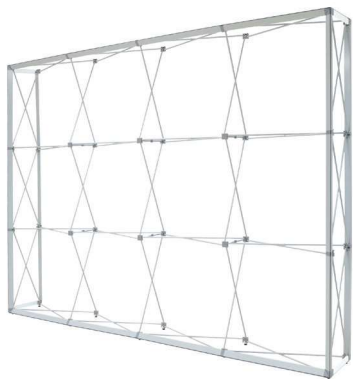

Frame



Bungeed SEG Channel Bars



Adjustable Feet



Channel Bars on Frame



Stabilization Feet (Optional)



L Link Connector (Optional)

## PRODUCT DESCRIPTION

Introducing the Locus Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Locus shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	117.75" W x 88.75" H x 14.5" D
GRAPHIC DIMENSIONS	117.5" W x 88" H

## GRAPHIC MATERIAL

Stretch Fabric

## GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

## DISPLAY CONSTRUCTION

Aluminum Frame

## SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	31 lbs (frame only) 34 lbs (with graphics)
Shipping Dimensions	34" L x 14" W x 9" H

## LARGE QUANTITY FREIGHT

Freight Shipping	15 boxes per 48" L x 40" W x 48" H skids
Freight Weight	372 lbs (frame only) 408 lbs (with graphics)

## AVAILABLE ACCESSORIES

Ready Pop LED Lights (Black & Silver)	RPL LED Lights (Black & Silver)
LED Light Brackets	Stabilized Feet
Straight Link Connector	L Link Connector



Straight Link Connector (Optional)



# 4 X 3 LOCUS LIGHT WALL (NO LIGHTS)

## PARTS LIST




Qty 1 - Pop Up Frame



Qty 4 - 3 Section Channel Bars



Qty 2 - 4 Section Channel Bars

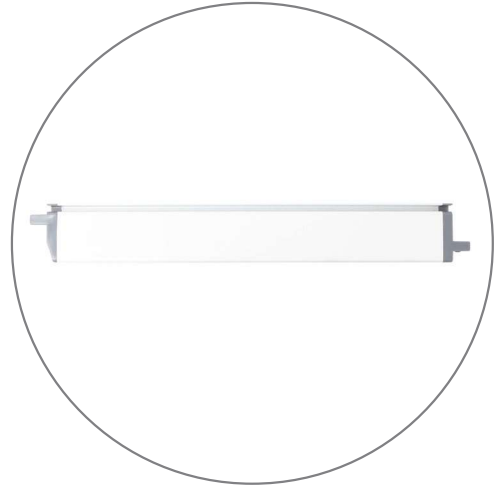

Qty 4 - Top & Bottom Endcaps



Qty 1 - Channel Bar Bag



Qty 1 - Carry Bag


# 4 X 3 LOCUS LIGHT WALL (NO LIGHTS)

## SET UP INSTRUCTIONS


### Set Up Pop Up Frame



**a.** Place frame with the adjustable feet facing down.




**b.** Expand the frame.

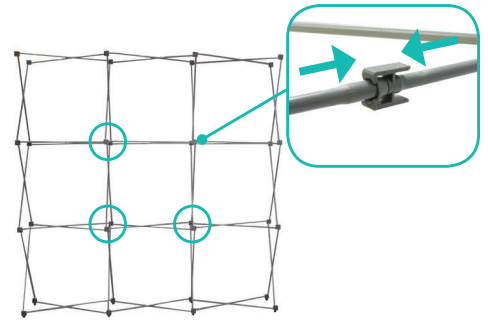


**c.** Close frame by pushing the outside of the frame until male and female ends connect.


### Insert Channel Bars

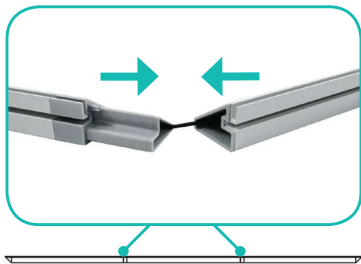

**a.** Expand each channel bar. Follow bungee to connect.

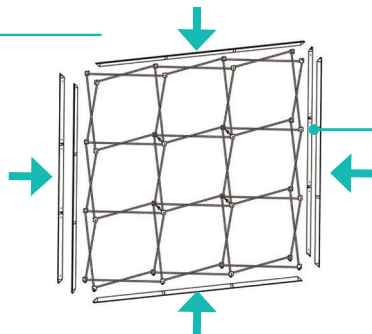

**b.** Attach channel bars to frame.

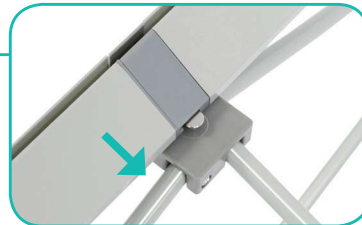

**c.** Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



**d.** Attach the top and bottom end caps on each side of the frame.

### Install Graphic



**a.** In each corner, insert the silicone edge beading into the groove.




**b.** Then insert the remainder of the beading.



**c.** Repeat graphic installation on the end caps.

### Optional Accessories


#### Light Bracket:



**a.** Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.



#### Stabilized Feet:



**a.** From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.

